

Spa Pumps
Circulation pump
BGP-HBP Series



BGP-HBP Series

Operating Conditions


- Liquid temperature up to +122°F
- Ambient temperature up to +122°F
- Max. Working pressure 3bar
- Continuous duty

Electric Motor

- Two-pole induction motor, 60hz (n=3450rpm)
- Single phase 110V-120V
- With thermal protector incorporated into the winding
- Insulation class F
- Protection IP55



Performance Curve

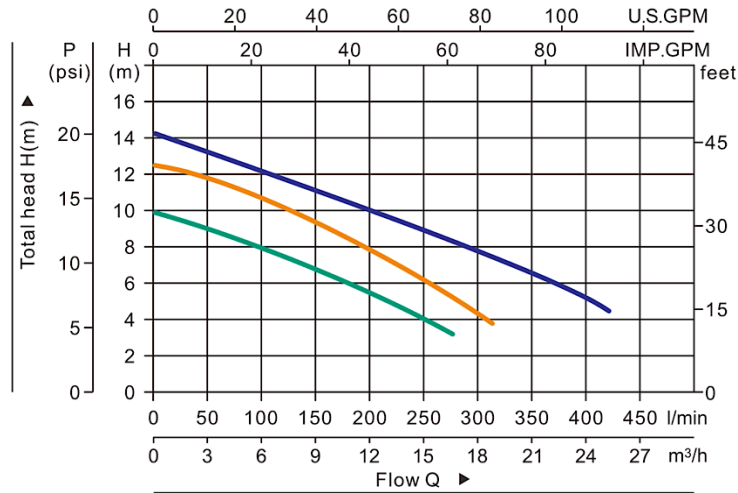

• BGP-HBP050 • BGP-HBP075 • BGP-HBP100

Performance Table

Model	Power				Q. Max	H. Max	V/Hz	Fitting Size
	P2		P2					
	kw	HP	kW	HP	l/m	m		mm
BGP-HBP050	0,37	0,5	0,55	0,75	290	9,50	110-120/60	48.5 or 50
BGP-HBP075	0,55	0,75	0,75	1	350	12,00	110-120/60	48.5 or 50
BGP-HBP100	0,75	1	1,10	1,50	420	14,00	110-120/60	48.5 or 50